

UFL Series Single Cartridge Ultra Filtration Listed



UFL - 420



UFL - 440



System Tested and Certified by NSF
International against NSF/ANSI
Standard 42 and 53 for the reduction of:

Standard No. 42: Aesthetic Effects
Nominal Particulate Reduction Class I
Standard No. 53: Health Effects
Cyst Reduction
Turbidity Reduction.



AFT partners with companies from around the globe to produce an ultra filtration system that is both effective and simple to use. The UFL systems remove colloidal material, particulates, cysts, and bacteria; and substantially reduce the amount of viruses that may be present in potable water supplies. This same technology is now used by municipal filtration plants to operate at lower costs and do a more effective job of filtering water in a small space.


These systems are sized for point-of-use and point-of-entry applications and are available with a timed controller that automatically forward flushes the cartridge to keep it clean.

The UFL systems utilize a patented, multi-bore ultra filtration membrane, the first of a new era of revolutionary products that provide the latest innovations in reusable surface filtration technology. These units require minimal pretreatment, small installation space, and use very little water for cleaning. Recovery ratios of 98% or more are typical.

Features:

- **Patented Multi-Bore Ultra-Filtration Membrane Technology.**
- **Removes Bacteria from Water**
*(Tested and verified by independent laboratory testing).
- **Substantial Reduction of Viruses**
*(Tested and verified by independent laboratory testing).
- **Easy to Program.**
- **Intelligent System For Self Cleaning.**
- **Durable Membranes For Long Life.**
- **Perfect for Residential use or OEM Applications (NSF does not certify process water).**

Dimensions

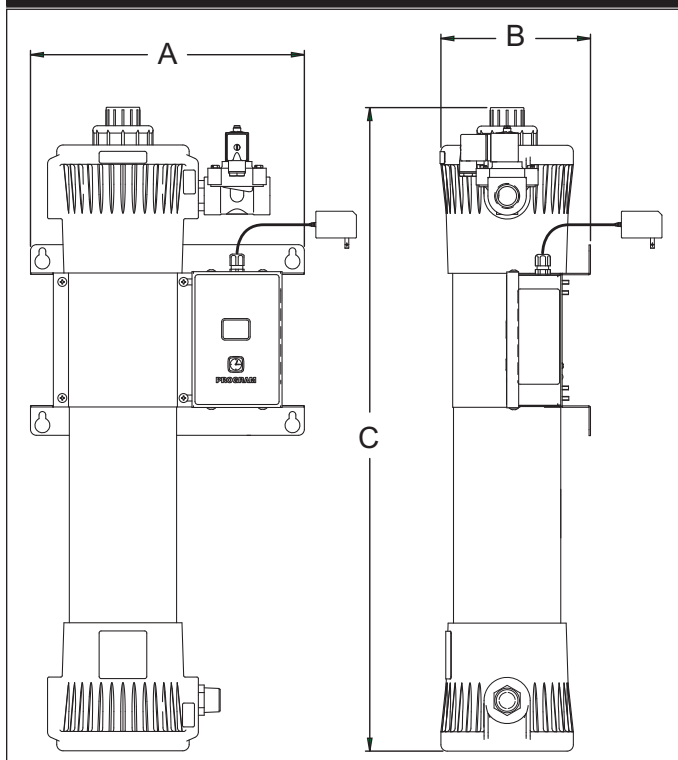

UFL-420 Dimensions

A Width inches (cm)	B Depth inches (cm)	C Height inches (cm)	Operating Weight (w/ water) lbs (kg)	Min. Clearance above or below unit
11.5 (29.2)	6.0 (15.2)	28.0 (71.1)	28.0 (12.9)	19 in. 48.2 cm

UFL-440 Dimensions

A Width inches (cm)	B Depth inches (cm)	C Height inches (cm)	Operating Weight (w/ water) lbs (kg)	Min. Clearance above or below unit
11.5 (29.2)	6.0 (15.2)	47.0 (119.3)	42.0 (19.0)	38 in. 96.5 cm

Electrical Cord & Plug Configurations

Model & Mfg. No.	Description	Part Number
9700464 & 9700474	Transformer (120 VAC - 24 VAC)	0700665
9700466 & 9700476	Transformer - Euro plug (230 VAC / 24 VAC)	0700666
9700469 & 9700479	Transformer - China plug (220 VAC / 24 VAC)	0700683

Capacity

Model	Gallons per minute (Liters per minute)	Gallons per hour (Liters per hour)
UFL-420	5 GPM (19 LPM)	300 GPH (1140 LPH)
UFL-440	10 GPM (38 LPM)	600 GPH (2280 LPH)

Electrical Ratings

Model	Voltage	Watts	Amps	Hertz
UFL-420 9700464	120	10	.08	60
UFL-420 9700466	230	10	.04	50
UFL-420 9700469	220	5	.02	50
UFL-440 9700474	120	10	.08	60
UFL-440 9700476	230	10	.04	50
UFL-440 9700479	220	5	.02	50

Plumbing Connection

Inlet	Outlet	Drain
1 inches NPT	1 inches NPT	3/4 inches NPT

Specifications (Filter Cartridges)

Maximum Operating Pressure	100 psig (690 kPa)
Maximum Operating Temp.	104°F (40°C)
Maximum Trans Membrane Pressure	45 psi (3.1 bar)
pH Range	3-10
MWCO	100 kD



A.J. Antunes & Co.

A.J. Antunes & Co.
Headquarters/Manufacturing
180 Kehoe Boulevard
Carol Stream, Illinois 60188 USA
Phone (630) 784-1000
Toll Free (800) 253-2991
Fax: (630) 784-1650

Antunes Equipment
Manufacturing (Suzhou) Ltd.,
9 Hou Ju Road, Building #24,
S&T Park, SND
Suzhou, Jiangsu, China 215011
Phone: 86-512-6841-3637
Fax: 86-512-6841-3907

www.ajantunes.com